



郡泰電子有限公司

JIN TAIRY ELECTRIC CO., LTD.

CE ISO-9001 國際品質認證

氣壓式油水分離機

JT-OW-020

PNEUMATIC OIL WATER SEPARATOR



產品規格 SPECIFICATIONS

型號	MODLE	JT-OW-020
尺寸	SIZE	378*258*750(mm)
淨重	NET WEIGHT	40kg
容量	CAPACITY OF WATER TANK	20.8公升(l)
處理流量(水)	MAX,FLUID QUANTITY	9.3公升/每分鐘 l/min
浮油處理流量	FLOAT OIL PROCESSING FLOW	0.5公升/每分鐘 l/min
濾桶容量	FILTER CAPACTY	300ml
氣動幫浦啟動壓力	AIR PUMP START PRESURE	1.6Bar(kgf/cm2)/2-3kg



使用前
BEFORE USE



使用後
AFTER USE



使用前
BEFORE USE



使用後
AFTER USE



處理中
PROCESSING



廢油排出
WASTE OIL DISCHARGE

總公司

台南市安平區建平八街454號

T:+886-6-2982497-8 F:+886-6-2982896

Email:jin.tairy@msa.hinet.net

<http://www.jin-tairy.com.tw>





1. 提高切削液效能

Improve cutting fluid efficiency

切削液可保持清潔穩定，發揮切削液之最高效益，延長切削液壽命，降低切削液成本。

Cutting fluid can be keep clean and stable,giving full play to cutting fluid extend cutting fluid life and reduce cutting costs.

2. 大幅降低刀具成本

Dramatic reduction in tool costs

保持切削液乾淨，有效維持工件及刀具間的潤滑冷卻效果，增長刀具壽命，降低刀具成本。

Keep cutting fluid clean.increan tool life and reduce tool costs.

3. 建立健康環保的工作環境

Establish a healthy and environmentally friendly working environment


有效分離浮油，大幅降低加工時所產生的油氣，改善工廠空氣品質。

Effective separation of float oil.significantly/reduces oil mist generated during machine working improve factory air quality.

優點 ADVANTAGE

- 1.浮油處理速率快、體積小、移動自如(方便使用多台機台)、車床(專利接頭)。
- 2.不鏽鋼濾桶，無任何耗材。

- 1.fast float oil processing small machine size move freely(convenient use of multiple machine),lathes(patented connector)
- 2.stainless steel filter bucket,without any harrow supplies.

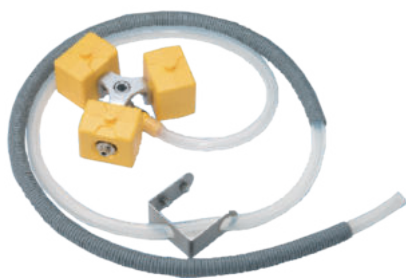

浮球吸座

Floating ball suction seat

4. 有效減少切削液腐壞

Effectivly reduce cutting fluid decay

保持切削液乾淨，降低細菌生成速度，防止臭味產生。

Keep cutting fluid clean reduce virus production prevent stench.



Connecting tube type oil water separator
連通管式油水分離機

二次油水分離達成完全油水分離效果
專利案號:106200513

Secondary oil water separation to achieve complete oil water separation effect
Patent NO.106200513